


Controlling motors the easy way

# drive ...

Motor control system  
for the drylin® E drive technology

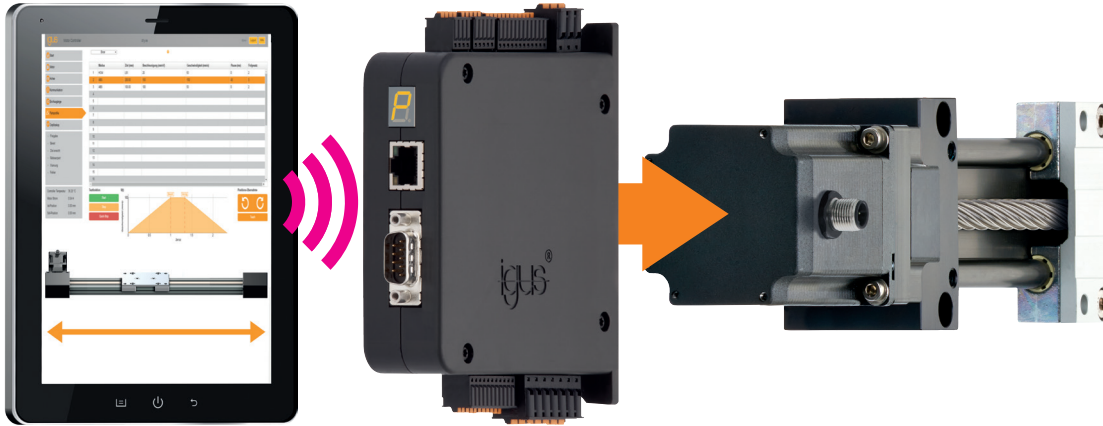


plastics for longer life® ...igus

# control

[www.igus.eu/dryve](http://www.igus.eu/dryve)

# "dryve" control unit ...

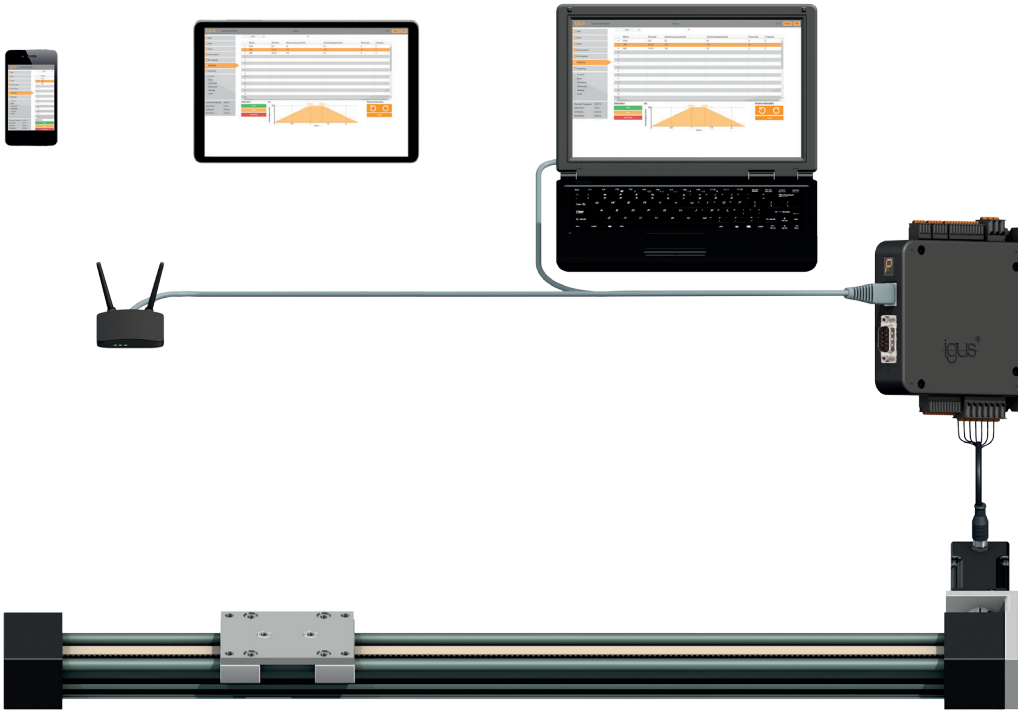

**drylin® linear system supplemented with the addition of the motor control. Easy to operate via web-based user interface, without installation of any software or app.**

Travel distances, positions, speeds, operating times – easily defined in the new web-based control system from igus®. A simple and intuitive browser-based user interface, extensive functionality with the option of "remote control" via Ethernet (Intranet) or bus system - "dryve" is the simple motor control method from igus® for your linear guide system.

- Control via laptop, tablet or smartphone
- Suitable for all drylin® E axes
- For DC, EC and stepper motors
- Communication by means of CANopen, Ethernet and digital inputs and outputs
- Compatible with many industrial control systems
- Cost-effective

# ... detailed



Try online  
[www.igus.eu](http://www.igus.eu)  
/dryve

## Ready to use immediately

The dryve motor control system can either be connected to your network or you can connect it directly to the control unit (PC or PLC) by means of a network cable. You can then start the control system directly in the browser without software installation. Settings can be changed quickly.

## Industry standards

Due to standardised communication protocols such as CANopen or Modbus TCP, it is very easy to connect the system to industrial controllers such as the Siemens S7 or Beckhoff.

The ten digital inputs and outputs enable extremely easy communication with industrial controllers but also with low-price open-source modules such as Arduino or Raspberry Pi.

## Easy control

You can use the simple intuitive user interface to parameterise travel distances, position, feed and operating time of your linear axis even as an amateur.


Movements that are continuously repeated are known as looping can be set in just a few seconds. A teach function enables position settings to be made with just one mouse click.

## Powerful technology

dryve supports DC, EC and stepper motors in open loop and closed loop technology.

The supply voltage of up to 48 V ensures high motor speeds. The nominal current of 7 A and the peak current of 20 A results in powerful and dynamic movements.

# Test online ...

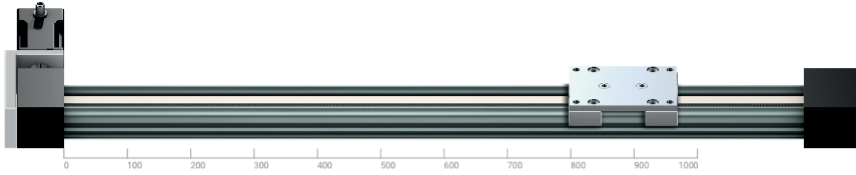

igus dryve Motor Controller igus Help Logout

#	Mode	Position (mm)	Acceleration (mm/s <sup>2</sup> )	Velocity (mm/s)	Deceleration (mm/s <sup>2</sup> )	Pause (ms)	Next
1	ABS	800	80	150	80	0	2
2	ABS	0	100	200	100	0	1
3	ABS						
4	ABS						
5	ABS						
6	ABS						
7	ABS						
8	ABS						

**Test functions**

- Start
- Stop
- Quick Stop

**Fast programming**

- Teach

**V(t)**

**Controller**  
Temperature 45.15 °C  
Motor Current 2.1 A  
Position 800.00 mm  
Desired Position 0.00 mm

*In this simulation only 8 rows are programmable. For better demonstration acceleration and deceleration are limited to 1000 mm/s<sup>2</sup>. Velocity is limited to 500 mm/s.*

## Try out the user interface

By using the simple browser-based user interface, you can set the travel mode, positions, rates of acceleration, speed and pause times of your linear axis without having to have any previous knowledge.

Test the user interface here, using a simulated linear axis. In exactly the same way as in this simulator, your input is transmitted directly when you use the real control system. There is no separate upload.

[www.igus.eu/dryve](http://www.igus.eu/dryve)

# ... configure online

**drylin® - drive technology configurator**

**Input** | **Result** | **Configuration**

Linear table:  without Motor |  with Motor

Case of application:  Horizontal |  Vertical |  Lateral |  Inverse

Units of Measure:  metric

Load: up to 0.5 kg | Temperature: 2 | Accuracy class: 1

Feed rate: up to 0.1 m/min | Net weight

Acceleration: up to 1 m/s<sup>2</sup> | Robustness

Stroke length: up to 100 mm | Center of mass Coordinates: Sx 1 mm, Sy 5 mm, Sz 11 mm

Corrosion-resistant |  Underwater |  Stainless steel |  Reverse |  FDA compliant

Duty cycle: 10 %

84 Article

An optimum selection was calculated. Click on "Continue" for the detailed comparison table.

SHTC from 252,53 EUR | SHT from 270,03 EUR | ZLW-B from 300,22 EUR | SLW from 308,03 EUR | SHT-PL from 350,85 EUR

**drylin® - drive technology configurator**

**Input** | **Result** | **Configuration**

Linear table  
Stroke length: 100 mm  
Shaft end length: 17 mm  
Order number: SHTC-12-A1W 126,00 EUR

Motor kit (motor, motor flange, coupling, screws)  
Motor type: NEMA17 Voltage: 24V  
Connection:  Litz wires |  Connectors  
 Encoder |  Brake  
Order number: MK-0009 127,13 EUR

Assembly / alignment, electrical connection / function test  
 0° (Standard) |  90° |  180° |  270°  
Motor view from the back, with horizontal axis  
Order number: MONT0030000 34,80 EUR

drylin® drive control system  
Digital control of drylin® E linear axes. Communication via CANopen, Ethernet and digital inputs and outputs. Delivery from November 2016.  
Order number: D1 298,00 EUR


Initiatorkit (End- and reference switch, bracket, screws, spacers)  
Version: Inductable NC, PNP | Proximity switch:  Yes |  No  
Piece: 1 | Cable length: 3 m  
Order number: IK-0011-BG-10 81,31 EUR | Total: 81,31 EUR

**Total price: 667,24 EUR**

Back | Parts list (PDF) | 1 Piece | Add to shopping basket

## Product finder and service life calculation

drylin® E linear axis – with lead screw or toothed belt drive, including motor, connecting cables and built-on parts – can be configured online and delivered ready to install. You can also order the drive control system at the same time with just one click.



[www.igus.eu/drylinE-finder](http://www.igus.eu/drylinE-finder)

# Technical data ...

1 Voltage supply

2 Digital inputs

3 Digital outputs

4 Analogue inputs

5 Motor & brake connection

6 Encoder

7 CANopen


8 Ethernet

9 Status display



<b>Nominal voltage of logic supply</b>	12 – 24 VDC
<b>Nominal voltage of load supply</b>	12 – 48 VDC
<b>Motor types</b>	2 -phase stepper motor, bipolar (ST), direct current motor (DC), electrically commutated motor (EC)
<b>Continuous motor current</b>	7A
<b>Peak motor current</b>	ST: 10A, DC: 14A, EC: 21A max. 2 sec depending on frequency of movement
<b>Load power output</b>	max. 340 W continuous
<b>Output current of digital outputs</b>	max. 200 mA per output
<b>Holding brake</b>	24VDC / 1A
<b>Encoder</b>	Hall sensor (2 or 3 pole), encoder (line driver-RS422 or single ended) analogue feedback via analogue inputs
<b>Digital inputs</b>	10 digital inputs, pre-assigned function, choice of NPN or PNP, short-circuit-proof, electrically separated, 5 – 24 V DC (external)
<b>Digital outputs</b>	5 digital outputs, pre-assigned function, choice of NPN or PNP, short-circuit-proof, electrically separated, 5 – 24 V DC (external)
<b>Analogue inputs</b>	2 analogue inputs, $\pm 10$ V DC signal (12 bit), 0-10 V DC signal (11 bit), 10 V DC voltage supply
<b>Interfaces</b>	CANopen, Modbus TCP, Ethernet, bit coding, step/direction
<b>Operating modes (motor)</b>	Open-loop with/without position monitoring, closed-loop
<b>Travelling modes</b>	Binary: 32 travelling movements Jog/teach: 8 travelling movements with external teaching mode step/direction
<b>CE symbol</b>	Acc. to EMC guideline
<b>Ambient temperature</b>	-20 °C to +45 °C
<b>Relative humidity</b>	$\leq 90$ %, non-condensating
<b>Maximum temperature of the power unit</b>	90 °C
<b>Bearing temperature</b>	-40 °C to +60 °C
<b>Protection class</b>	IP 30
<b>Protective functions</b>	I <sup>2</sup> t monitoring, power-unit temperature monitoring, current monitoring, undervoltage and overvoltage protection, contouring error detection, encoder control
<b>Mounting</b>	Screwed on, DIN rail mounting
<b>D x W x H in mm (incl. connectors and mounting elements)</b>	123.5 x 31.2 x 139

# Technical data ...

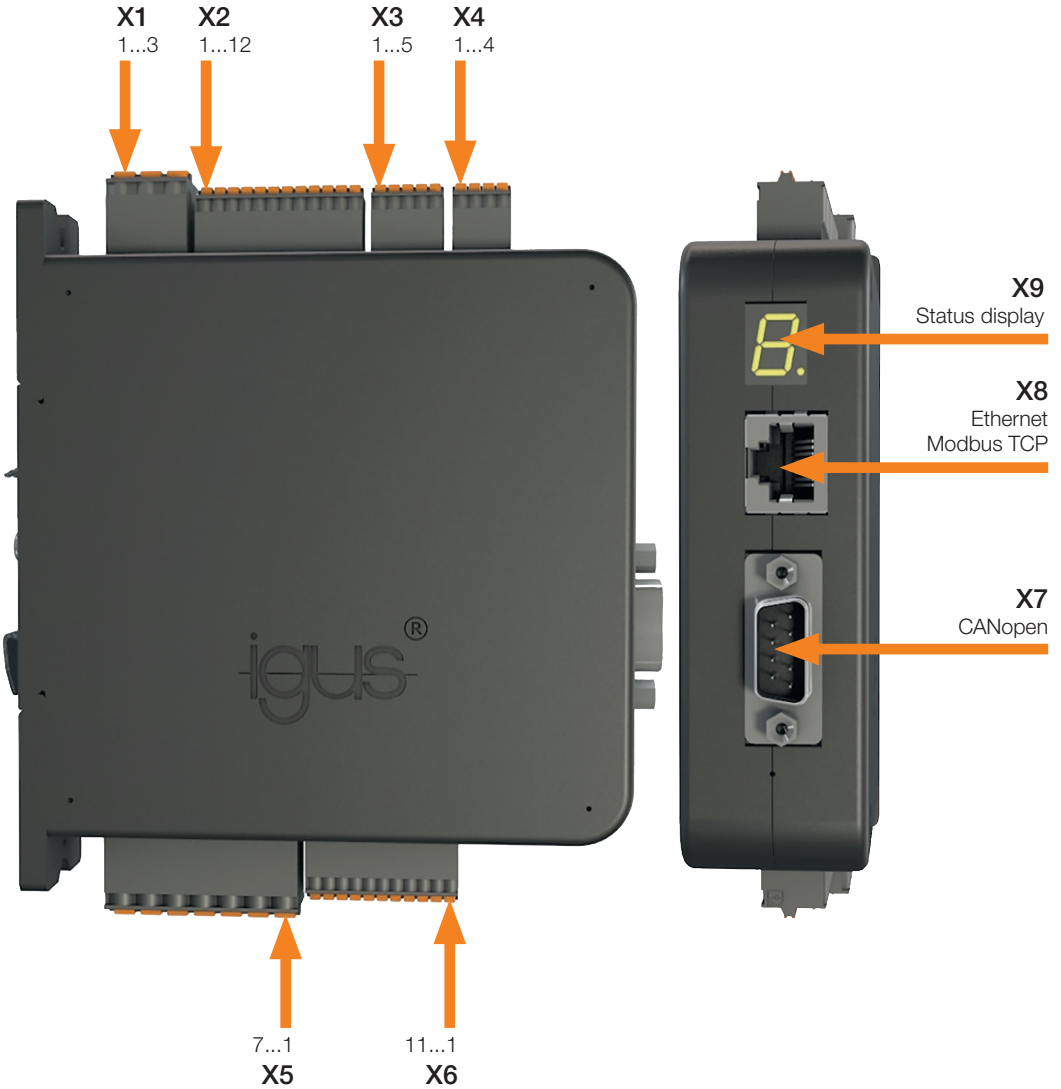


The arrows indicate Pin 1 of the respective connector.



Socket		PIN	Layout	Bezeichnung			
X1	Logic/load voltage	1	12-48 VDC load	Power supply motors (necessary for operation)			
		2	0 VDC load/logic	Common mass (necessary for operation)			
		3	12-24 VDC logic	Power supply control unit (necessary for operation)			
				<b>Binary</b>	<b>Tipp/Teach</b>	<b>Step/direction</b>	
X2	Digital inputs	1	Digital input 1	Bit 0	Bit 0	Step	
		2	Digital input 2	Bit 1	Bit 1	Direction	
		3	Digital input 3	Bit 2	Bit 2	-	
		4	Digital input 4	Bit 3	Tipp left	-	
		5	Digital input 5	Bit 4	Tipp right	-	
		6	Digital input 6	Start	Start/teach	-	
		7	Digital input 7	Enable	Enable	Enable	
		8	Digital input 8	Ref/LS positive	Ref/LS positive	Ref/LS positive	
		9	Digital input 9	Ref/LS negative	Ref/LS negative	Ref/LS negative	
		10	Digital input 10	Stopp/Reset	Stopp/Reset	Reset	
		11	5-24 VDC	Power supply external (necessary for operation)			
		12	0 VDC	Power supply external (necessary for operation)			
X3	Digital outputs	1	Digital output 1	Ready			
		2	Digital output 2	Active			
		3	Digital output 3	Referenced			
		4	Digital output 4	Alert			
		5	Digital output 5	Error			
X4	Analogue inputs	1	10 VDC	Provided by control unit			
		2	Signal 1	Speed and position			
		3	Signal 2	Position feedback, mechanics			
		4	0 VDC	Provided by control unit			
X5	Motor/brake	1	A (ST), U (EC), +(DC)	Connection motor			
		2	A(ST), V (EC), -(DC)	Connection motor			
		3	B (ST), W (EC)	Connection motor			
		4	B(ST)	Connection motor			
		5	Mass	Mass			
		6	24 VDC motor stop brake	Connection motor stop brake			
		7	0 VDC motor stop brake	Connection motor stop brake			
X6	Encoder	1	5 VDC	Power supply rotary encoder			
		2	0 VDC	Power supply rotary encoder			
		3	A	Rotary encoder			
		4	A/	Rotary encoder			
		5	B	Rotary encoder			
		6	B/	Rotary encoder			
		7	N	Rotary encoder			
		8	N/	Rotary encoder			
		9	H1 EC, +DC	Hall sensor			
		10	H2 EC, -DC	Hall sensor			
		11	H3 EC	Hall sensor			
X7	CANopen	1	-	Not use			
		2	CAN_L	CAN Signal Low			
		3	CAN_GND	CAN Mass			
		4	-	Not use			
		5	-	Not use			
		6	-	Not use			
		7	CAN_H	CAN Signal High			
		8	-	Not use			
		9	-	Not use			
X8	Ethernet Modbus TCP		Standard assignment in acc. with TIA-568A and TIA-568B				
X9	Status display						


# drylin® E drive technology ...

drylin® E drive technology includes completely lubrication-free linear modules, ready to install as single-axis or multi-axis systems. A self-locking trapezoidal thread, a fast high helix thread or toothed belts and dynamic racks serve as the drive. The stroke length can be freely selected and each system can be delivered ready for connection, together with the appropriate motor.



## Linear axes with motor from 24h

- Pre-configured linear axes available from stock
- Drive: lead screw or toothed belt
- NEMA stepper motor included




## Individual linear axes with motor

- Online configurable linear axes
- Drive: lead screw, toothed belt or rack
- With stepper and DC motors




## GRW cantilever axis

- Direct drive via rack
- Stroke lengths up to 300 mm
- Ideal as z axis in multi-axis gantries



## GRQ in lift/swivel unit

- GRQ in lift/swivel unit HSQ
- Compact unit for lifting and swivelling tasks
- Ready to install with NEMA stepper motors

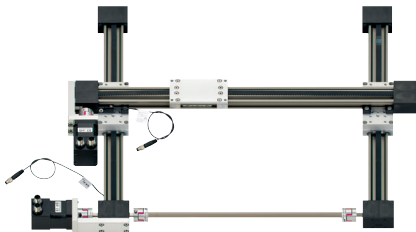

## Cartesian robots

- Pre-configured assembly kits available from stock
- 3 different types: linear / flat / room
- Workspaces up to 500 x 500 x 100 mm



## Lead screw motors

- Precise and efficient
- Compact structure, variable lead screw pitches
- Stepper motors with/without encoder

# ... intelligent linear guide



## Intelligent drylin® predicts the date when it needs to be replaced while it runs

Predictive maintenance becomes reality with smart drylin®. The intelligent linear slide monitors its life autonomously. If isense DL.W (intelligent sensor module) recognises that a failure due to wear is likely, the user is automatically informed. Machine availability rises while maintenance costs decrease.


For the world's largest system for linear guides with sliding plastic components, there are already numerous configurators for calculating service life. The data for the calculation come from the igus® test laboratory. In an area of more than 2,700 m<sup>2</sup>, approx. 15,000 tests with bearings are performed every year. The results are

incorporated into the igus® database, thus forming the basis for service life calculation and continuous improvement of the products. With its new smart plastics, igus® is now taking the next steps for even more protection against sudden, unexpected failures.

### Reduce costs:

- Predictable maintenance
- Prevention of unplanned down-times
- Optimal machine availability

Easy to retrofit  
isense DL.W modules

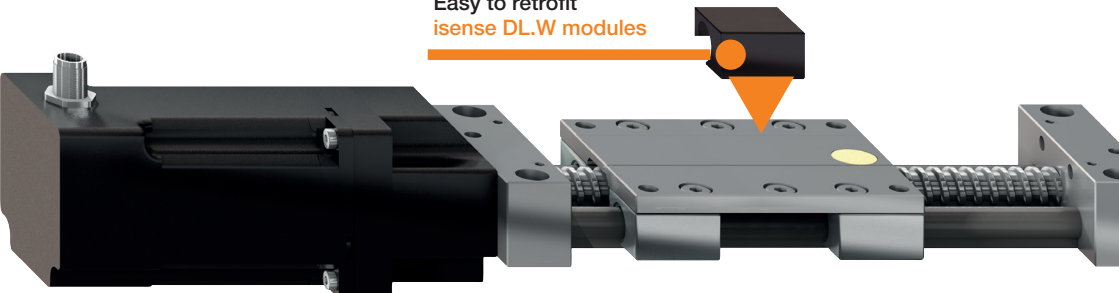

# /9001:2008 /16949:2009

igus® is certified in accordance with ISO 9001:2008 and ISO/TS 16949:2009 in the field of energy supply systems, cables and harnessing, as well as plastic bearings.

## /contact



**René Erdmann**  
Head of Business Unit  
drylin® E Drive Technology  
Phone: +49-2203 9649-7206  
e-mail: [rerdmann@igus.de](mailto:rerdmann@igus.de)

## /dryve support

For your technical questions please contact our dryve support team.

Phone: +49-2203 9649-845

e-mail: [dryve@igus.de](mailto:dryve@igus.de)

# igus®

igus® GmbH

Spicher Str. 1a

51147 Cologne

Phone +49-2203 9649-145

Fax +49-2203 9649-334

[info@igus.de](mailto:info@igus.de) [www.igus.eu](http://www.igus.eu)

© 2016 igus® GmbH

MAT0073800.20 Issue 11/2016  
Subject to technical alterations.

# Drive technology